

Limit Switch Box YT-870, YT-875 (flameproof)

Product Number: YT-870, YT-875 ■ ■ ■ (specify your requirement)

Model	Switching Type	Connection Type	Bracket Type
YT-870	M Mechanical Type (2 x SPDT)	1 NPT3/4	1 ST-1 (30*80, H20)
YT-875	P Proximity Type	2 PF3/4	2 ST-2 (30*80, H30)
	D Mechanical Type (2 x DPDT)	3 M20	3 ST-3 (30*130, H30)
		4 NPT1/2	4 ST-4 (30*130, H50)
		5 PT1/2	




YT-870



YT-875

Item · Type	YT-870M YT-875M	YT-870P YT-875P	YT-870D YT-875D
Switch Type	Mechanical Switch x 2	Proximity Sensor x 2	Mechanical Switch x 4
Switch Rating	AC: 250V 3A, 125V 5A DC: 250V 0.2A, 125V 0.4A, 30V 4A	12-24VDC (Operating Voltage: 10-30VDC) P&F Type: 0-25VDC	AC: 125 or 250V 10A 480V 2A
Enclosure Protection	IP67		
Explosion Proof	Ex d IIC T6		
Ambient Temp.	-20 °C ~ 60 °C		
Conduit Entry	NPT3/4 (PF3/4, M20)		
Terminal	8 Points		
Mouting Bracket	NAMUR VDI / VDE 3845, ISO 5211		
Material	YT-870	Aluminum Diecasting	
	YT-875	Stainless Steel 316	
Weight	YT-870	1.5kg (3.3lb)	
	YT-875	3.5kg (7.7lb)	

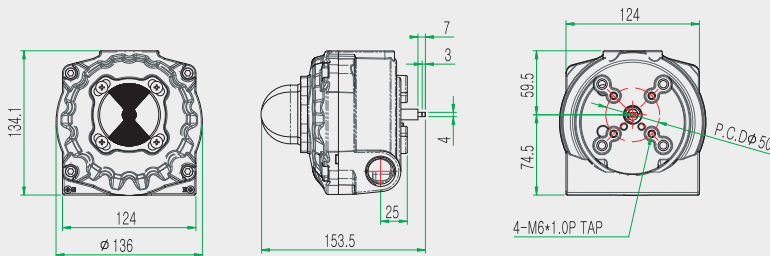

- Visual position indicator
- 8 contacts of terminal ports.
- Compatibility with any rotary motion actuator <ISO5211>
- Easy adjustment of cam position
- Dual 1/2" conduit entries.